


REV	DESCRIPTION	BY	DATE	ECN
A	ENGINEERING RELEASE	RAF	2-23-94	MI1296
B	8.00±0.28 [.315±.011] WAS 8.0±0.03 [.32±.01]	GCB	6-12-96	28265

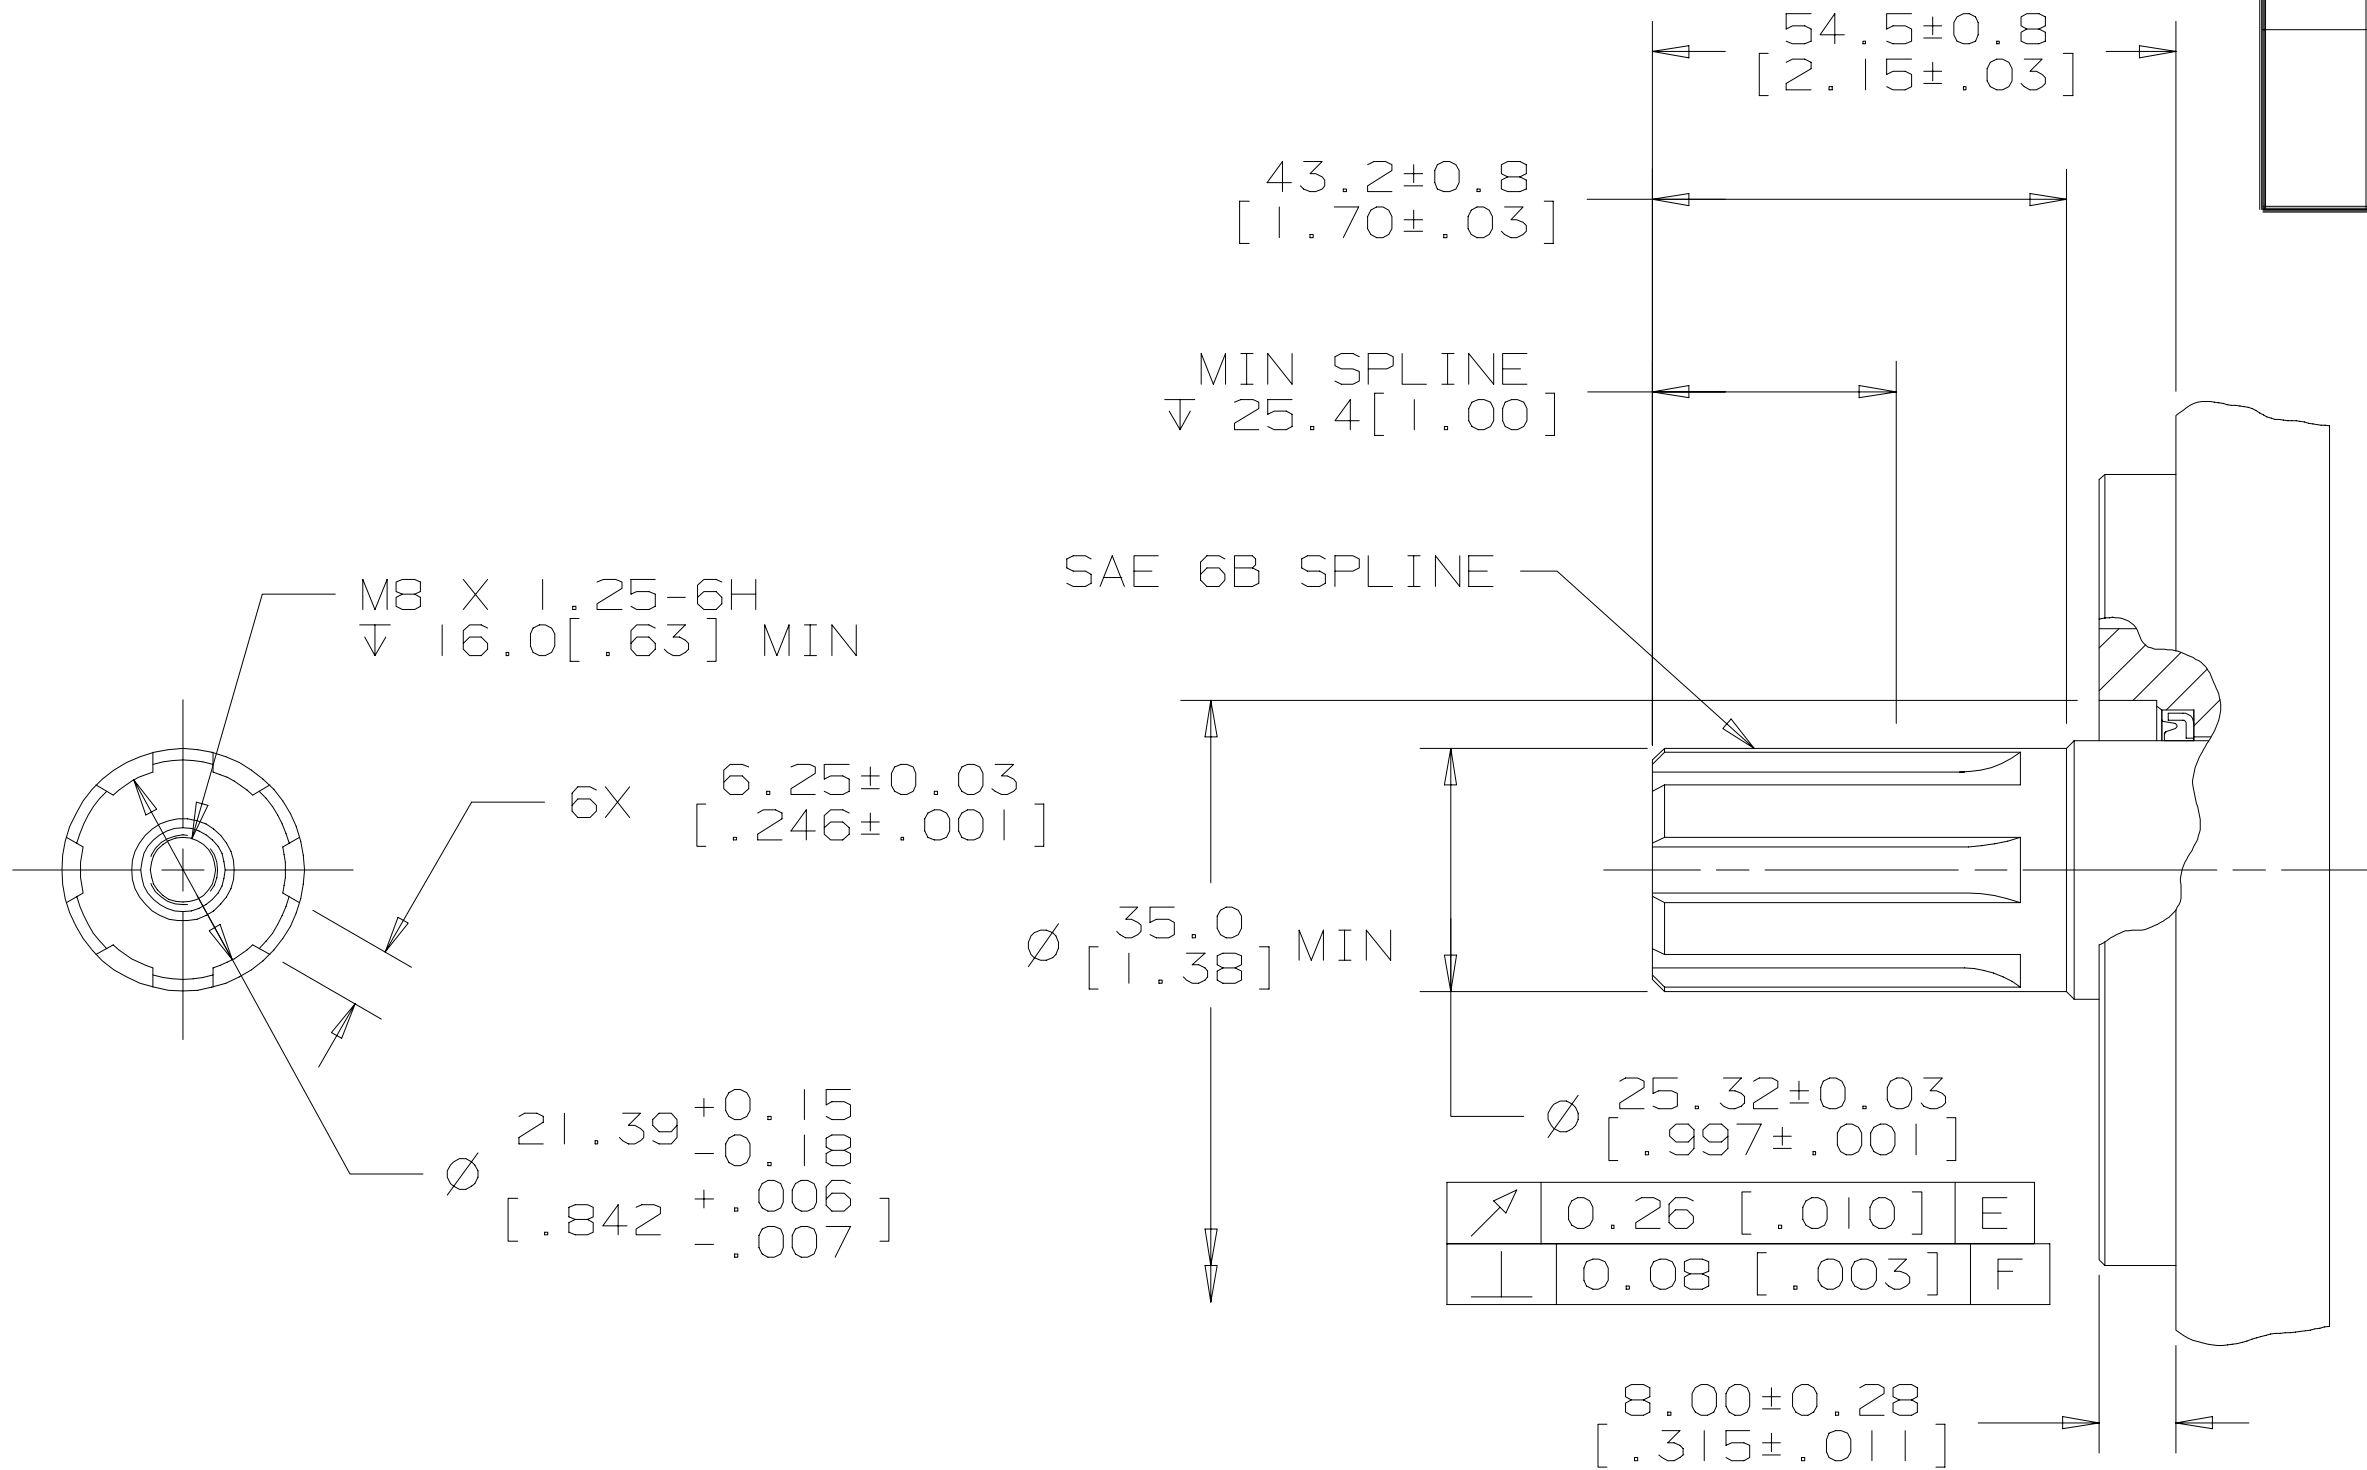

G M S

NOTE  
 1 OUTPUT SHAFT  
 49 = 25.4 [1.00] SAE 6B SPLINE WITH  
 M8 X 1.25 THREADED HOLE,  
 54.5 [2.15] SHAFT EXTENSION

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES <input type="checkbox"/> MILLIMETERS <input checked="" type="checkbox"/> TOLERANCES .X ±---- .XX ±---- .XXX ±---- < ±---- UNSPECIFIED RADII ARE ---- UNSPECIFIED DRAFT ANGLES ARE ---- DRAWING FORMAT CADD <input checked="" type="checkbox"/> MANUAL <input type="checkbox"/>	DRAWING BASED ON ANSI Y14.5M-1982	
	NOTICE TO PERSONS RECEIVING THIS DRAWING AND / OR TECHNICAL INFORMATION Eaton Corporation claims proprietary rights in the information disclosed hereon. This document is issued in confidence and is not to be reproduced or used to manufacture anything shown hereon without the written permission of the Eaton Corporation.	
DRAWN BY/DATE RAF 3/1/94 CHECKED BY/DATE SDR 3-2-94 ENGRG BY/DATE RVA 3-3-94 METALLURGY BY/DATE ----	MATERIAL/HEAT TREAT TITLE SHAFT INSTALLATION	
MICROINCHES <input type="checkbox"/> MICROMETERS <input type="checkbox"/> THIRD ANGLE PROJECTION DO NOT SCALE	NUMBER A-109-049 SCALE 1/1 SHEET 1 OF 1	