
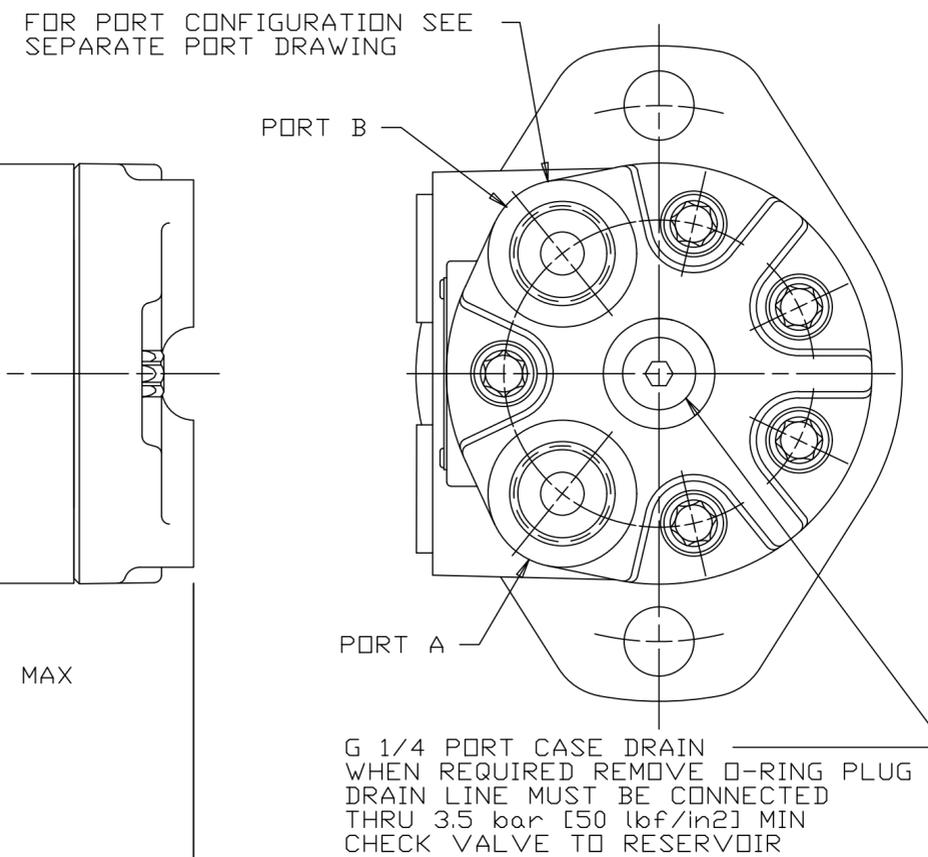
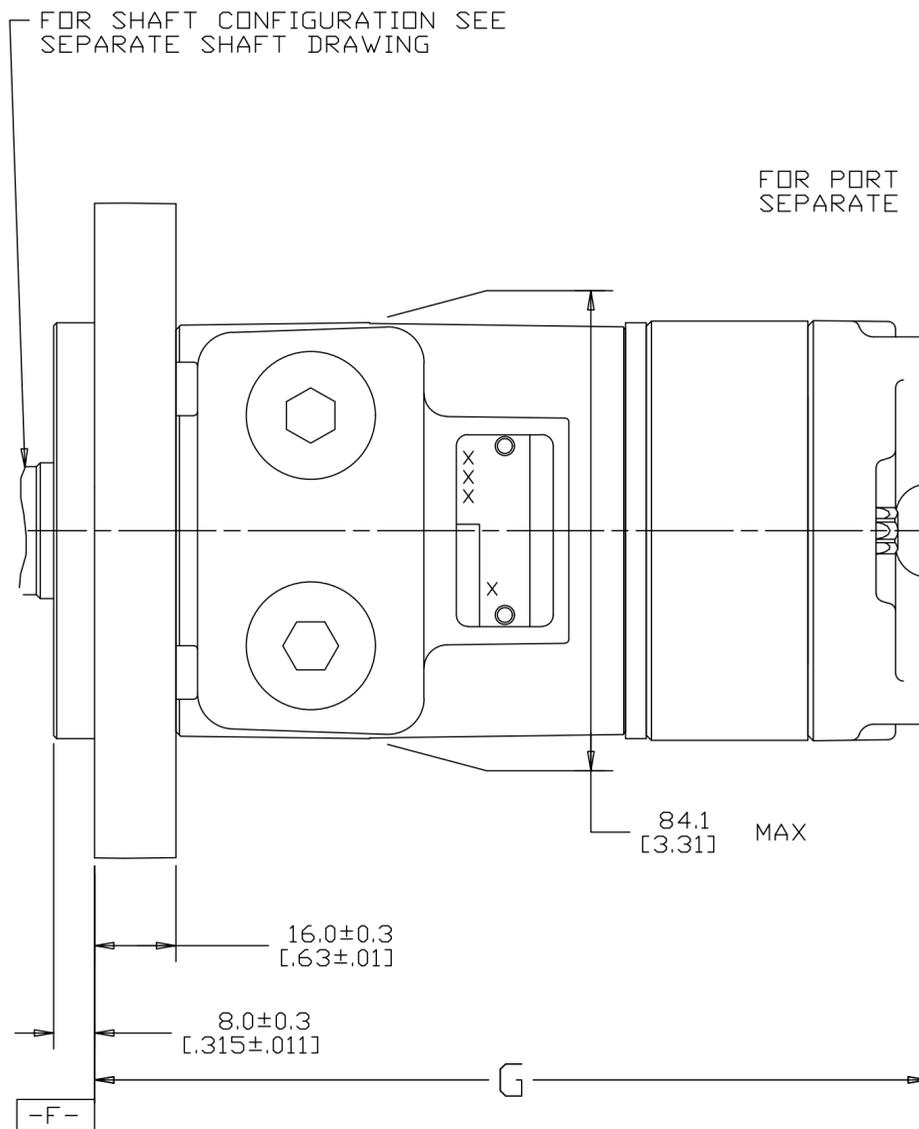


DISPL CODE	G MAX
022	139.1 [5.48]
025	139.9 [5.51]
028	139.1 [5.48]
035	142.9 [5.63]
045	142.9 [5.63]
059	145.9 [5.75]
073	149.2 [5.88]
089	152.8 [6.02]
097	154.6 [6.09]
113	158.1 [6.23]
141	164.5 [6.48]
179	173.1 [6.82]
226	183.5 [7.23]
451	234.4 [9.23]

REV	DESCRIPTION	BY	CHK	DATE	ECN
A	ENGINEERING RELEASE	GCB		1-31-97	M16782
D	REVISED	YUP	JSB	08-31-10	M79943
E	NOTE 3 WAS CASE DRAIN: 2 = G 1/4 BSP...	ABH		07-27-15	0065202

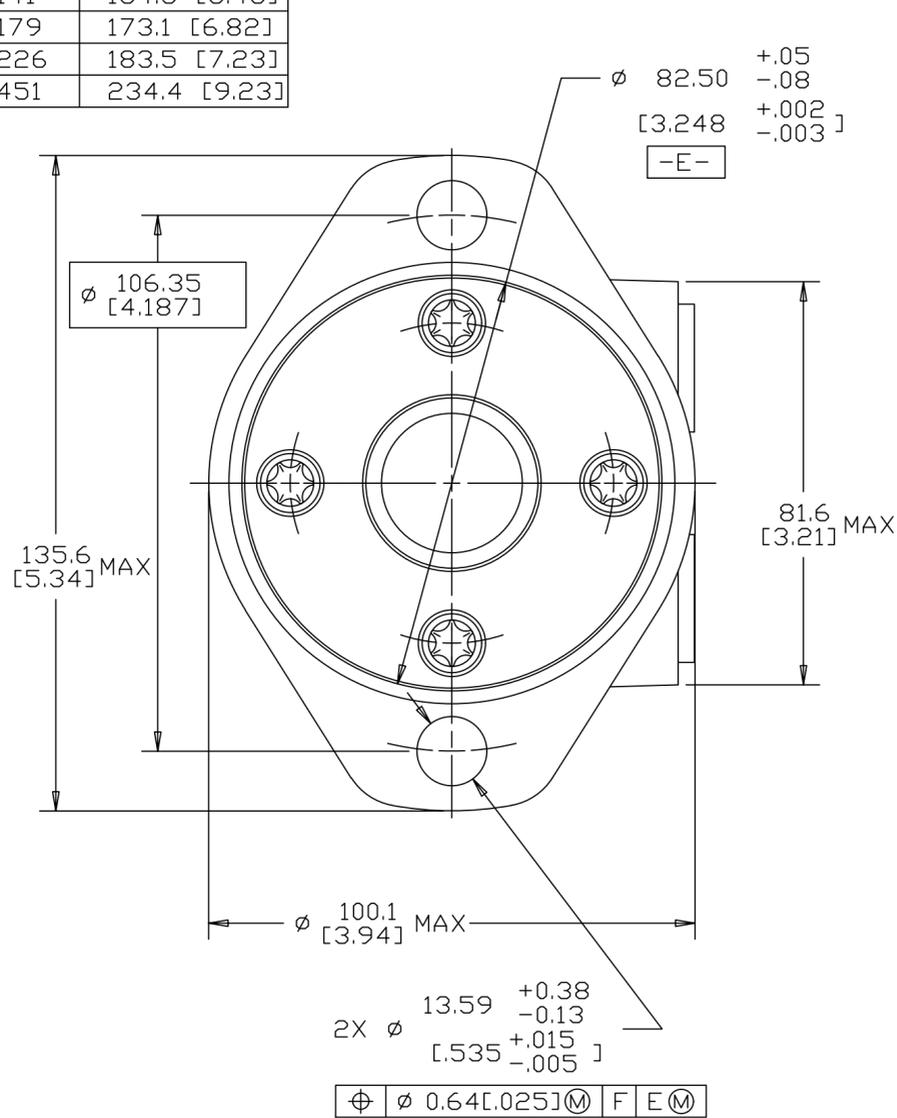

- NOTE:
- ROTATION:
 - STANDARD: WHEN FACING SHAFT END OF MOTOR SHAFT TO ROTATE CLOCKWISE WHEN PORT "A" IS PRESSURIZED COUNTERCLOCKWISE WHEN PORT "B" IS PRESSURIZED
 - REVERSE: WHEN FACING SHAFT END OF MOTOR SHAFT TO ROTATE CLOCKWISE WHEN PORT "B" IS PRESSURIZED COUNTERCLOCKWISE WHEN PORT "A" IS PRESSURIZED
 - MOUNTING FLANGE:
 - MA = 2 BOLT STD: $\phi 82.6$ [3.25] X 8.1 [3.2] PILOT
 - $\phi 13.59$ [5.35] MOUNTING HOLES ON $\phi 106.2$ [4.18] B.C.
 - CASE DRAIN:
 - 02 = G 1/4 PORT (END CAP)

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES <input type="checkbox"/> MILLIMETERS <input checked="" type="checkbox"/> TOLERANCES X ± ---- .XX ± ---- .XXX ± ---- < ± ---- UNSPECIFIED RADII ARE ---- UNSPECIFIED DRAFT ANGLES ARE ---- DRAWING FORMAT CADD <input checked="" type="checkbox"/> MANUAL <input type="checkbox"/>	DRAWING BASED ON ANSI Y14.5M-1982		
	THE REPRODUCTION, DISTRIBUTION AND UTILIZATION OF THIS DOCUMENT AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHER WITHOUT EXPLICIT AUTHORIZATION IS PROHIBITED. OFFENDERS WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHT RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL OR DESIGN. (PER ISO 16016)		
	DRAWN BY/DATE GCB 2-4-97 CHECKED BY/DATE RAF 2-4-97 ENGRG BY/DATE RVA 2-6-97 METALLURGY ---- BY/DATE	MATERIAL/HEAT TREAT	
	THIRD ANGLE PROJECTION DO NOT SCALE	TITLE H MOTOR INSTALLATION MICROINCHES <input type="checkbox"/> NUMBER MICROMETERS <input type="checkbox"/> A-37-401 ARITHMETICAL AVERAGE <input checked="" type="checkbox"/> SCALE 1/1 SHEET 1 OF 1	