

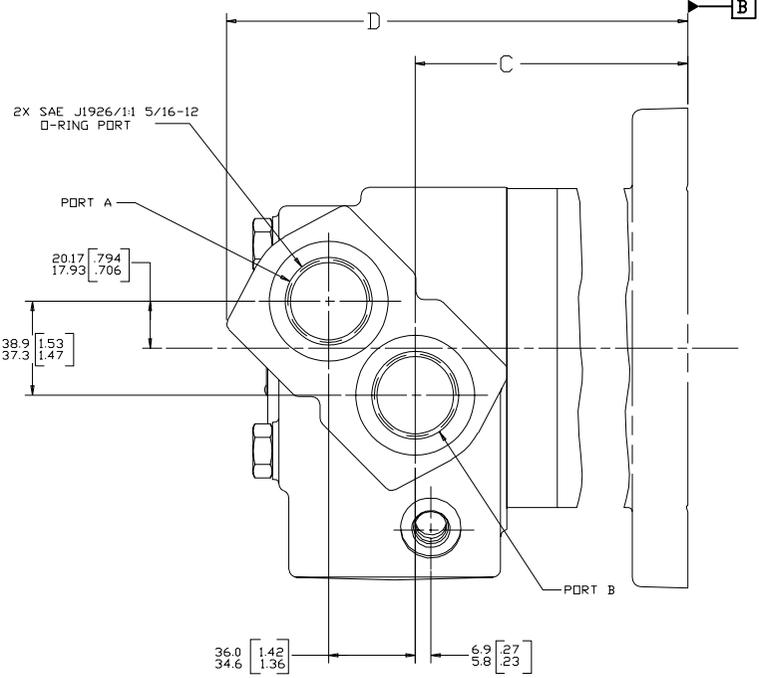


8			7			6			5			4			3			2			1		
MOUNTING TYPE AA & AM			MOUNTING TYPE AB,AD,AE,AF & AP,AR																				
DISP	C	D MAX	DISP	C	D MAX																		
120	104.3-106.5 [4.11-4.19]	188.4 [7.42]	120	185.9-189.5 [7.32-7.46]	270.4 [10.65]																		
150	109.9-112.1 [4.33-4.41]	194.0 [7.64]	150	191.5-195.1 [7.54-7.68]	276.0 [10.87]																		
190	117.3-119.4 [4.62-4.70]	201.2 [7.92]	190	198.8-202.5 [7.83-7.97]	283.3 [11.15]																		
239	126.2-128.3 [4.97-5.05]	210.1 [8.27]	239	207.5-211.1 [8.17-8.31]	292.1 [11.50]																		
300	137.1-139.2 [5.40-5.48]	221.1 [8.71]	300	218.6-222.3 [8.61-8.75]	303.2 [11.94]																		
381	151.8-154.0 [5.98-6.06]	235.8 [9.28]	381	233.1-237.0 [9.18-9.33]	317.9 [12.52]																		
450	164.4-166.5 [6.47-6.55]	248.4 [9.78]	450	245.7-249.5 [9.67-9.82]	330.5 [13.01]																		
490	171.7-173.8 [6.76-6.84]	255.7 [10.07]	490	253.0-256.8 [9.96-10.11]	337.7 [13.30]																		
600	191.7-193.9 [7.55-7.63]	275.5 [10.85]	600	273.0-276.9 [10.75-10.90]	357.6 [14.08]																		

MOUNTING TYPE AC			MOUNTING TYPE AH		
DISP	C	D MAX	DISP	C	D MAX
120	101.6-103.9 [4.00-4.09]	185.6 [7.31]	120	168.6-170.2 [6.64-6.70]	252.4 [9.94]
150	107.1-109.5 [4.22-4.31]	191.3 [7.53]	150	174.3-175.8 [6.86-6.92]	258.0 [10.16]
190	114.3-116.6 [4.50-4.59]	198.5 [7.82]	190	181.5-183.1 [7.15-7.21]	265.3 [10.44]
239	123.1-125.5 [4.85-4.94]	207.3 [8.16]	239	190.3-191.9 [7.49-7.55]	274.1 [10.79]
300	134.3-136.7 [5.29-5.38]	218.4 [8.60]	300	201.4-202.9 [7.93-7.99]	285.1 [11.23]
381	148.8-151.2 [5.86-5.95]	233.1 [9.18]	381	216.1-217.6 [8.51-8.57]	299.8 [11.81]
450	161.4-163.6 [6.35-6.44]	245.7 [9.67]	450	228.7-230.2 [9.00-9.06]	312.4 [12.30]
490	168.6-170.9 [6.64-6.73]	253.0 [9.96]	490	235.9-237.5 [9.29-9.35]	319.7 [12.59]
600	188.7-191.1 [7.43-7.52]	272.8 [10.74]	600	255.8-257.4 [10.07-10.13]	339.6 [13.37]

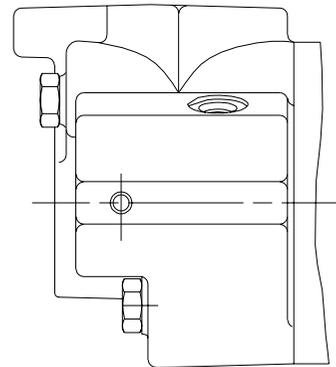

REV	DESCRIPTION	BY	CHK	DATE	ECN
A	ENGINEERING RELEASE	RAF		8-30-95	M14044
B	ADDED DISPLACEMENT CODE '49' TO ALL TABS	CMR		7-23-98	31517
C	-1X(A)NOTE 1 WAS PORT OPTION D -2X(INACTIVE	AGJ		5-6-99	32697
D	REACTIVATED -1X(REVISED AS PER STACK UP -2X(DRAWING UPDATED AS PER ASME Y14.5-2009 STANDARD	JVD	NRI	04-22-11	0031747

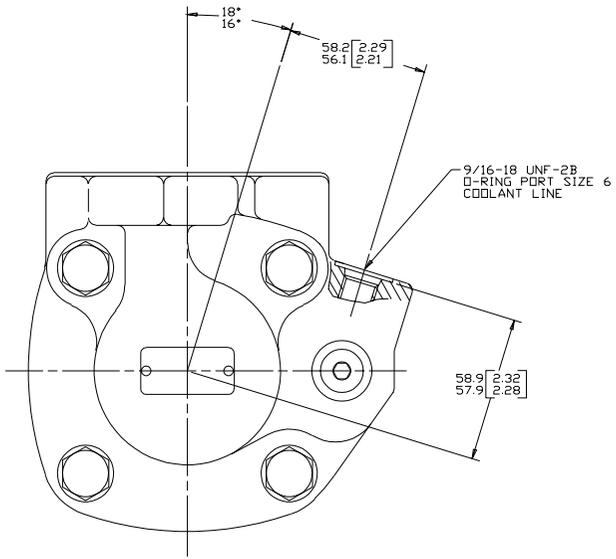

NOTE
1 PORT OPTION AA

REVIEWED FOR CLASSIFICATION PER ESP-042

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES MILLIMETERS	<input checked="" type="checkbox"/>	DRAWING BASED ON ASME Y14.5-2009	
TOLERANCES		xx = REF	xxxx = ONLY
UNSPECIFIED ANGLES ARE		UNSPECIFIED DRAFT ANGLES ARE	
D SIZE	DO NOT SCALE	SCALE	1/1

THE REPRODUCTION, DISTRIBUTION, AND UTILIZATION OF THIS DOCUMENT, AS WELL AS THE COMMUNICATION OF ITS CONTENTS TO OTHERS WITHOUT EXPRESS AUTHORIZATION IS PROHIBITED. OFFENSES WILL BE HELD LIABLE FOR THE PAYMENT OF DAMAGES. ALL RIGHTS RESERVED IN THE EVENT OF THE GRANT OF A PATENT, UTILITY MODEL, OR DESIGN (PER ISO 1010).

Danfoss

TITLE: 6000 SERIES MOTOR PORT INSTALLATION
NUMBER: A-1024-009
SHEET 1 OF 1